

PSC-CMS-2W-LT Series

Compact Micro Size 2-Wire infrared thermometer



Features

- Size: 14 mm O.D., 28 mm long, stainless steel housing
- Temperature range: -40°C to 1030°C
- Rugged coated silicon optics
- Usable up to 120°C (LT15) or 180°C (LT15H or LT22H) ambient temperature without cooling (sensing head)
- Green LED alarm indication, aiming support, self diagnostic or temperature code indication
- Cable built in electronics
- Scalable analog output: 4 - 20 mA and additional simultaneous alarm output
- Short circuit and polarity reversal protection
- Adjustable signal processing
- Optional USB programming interface and software
- Wide power range: 5-30 V DC

General Specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	-20°C - 120°C (LT sensing head) -20°C - 180°C (LTH sensing head) -20°C - 75°C ¹⁾ (electronics)
Storage temperature	-40°C - 85°C (sensing head and electronics)
Relative humidity	10 - 95%, non condensing
Vibration	IEC 68-2-6: 3 G, 11-200 Hz, any axis
Shock	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	42 g

Electrical Specification

Output/analog	4-20 mA
Loop resistance	max. 1000 Ω ²⁾
Output/alarm	0-30 V/500 mA (open collector)
Output/digital	uni-/bidirectional, 9.6 kBaud, 0/3V digital level, USB (option)
Input	Programmable functional input for triggered signal output or peak-hold function
LED functions	alarm indication, automatic aiming support, self diagnostic, temp. indication (via temp. code)
Cable length	
head - electronics:	0.5 m (standard), 3 m, 6 m
after electronics:	0.5 m (standard), 3 m
Power supply	5-30 V DC

Measurement Specifications

Temperature range (scalable via software)	-40°C - 1030°C
Spectral range	8 - 14 μm
Optical resolution (90 % energy)	15:1 (LT, LTH) 22:1 (LTH)
CF-lens (optional)	0.8 mm @ 10 mm (15:1) 0.6 mm @ 10 mm (22:1)
System accuracy	± 1.0% or ± 1.5°C ^{1), 2)}
Repeatability	± 0.5% or ± 0.75°C ^{1), 2)}
Temperature coefficient	± 0.05 C/C or 0.5%/K ³⁾
Temperature resolution	0.1 K
Response time (90%)	30 ms (LT) / 150 ms (LTH)
Emissivity/Gain (adjustable via 0-5 V DC input or software)	0.100 - 1.100
Transmissivity (adjustable via software)	0.100 - 1.100
Signal processing (parameter adjustable via software)	peak hold, valley hold, average; extended hold function with threshold and hysteresis
Dimensions of electronics	length: 35 mm diameter: 12 mm
Software	PSC Connect

¹⁾ object temperature > 0°C; whichever is greater

²⁾ at ambient temperature 23 ± 5°C

³⁾ for ambient temperatures <18°C and >28°C; whichever is greater


¹⁾ for Vcc (supply voltage) 5-12 VDC/ at Vcc > 12 VDC the max. ambient temperature of the electronics is 65 °C

²⁾ in dependence on supply voltage


PSC-CMS-2W-LT Series

Optical Specifications

Optics, D:S = 15:1

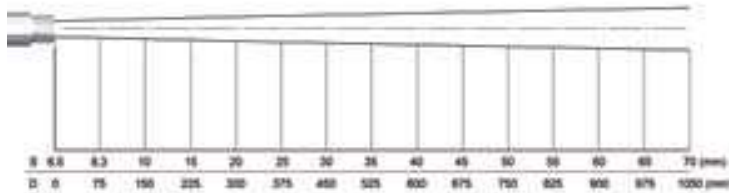


Optics with CF-lens, D:S = 15:1

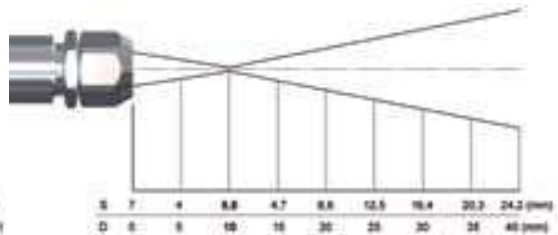

Dimensions/Interfaces


Analog Mode (Two wire connection)

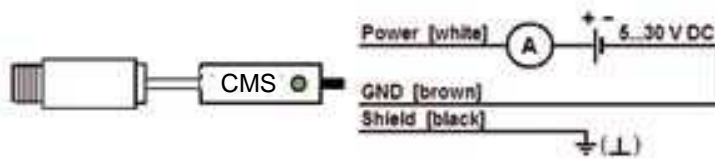


Dimensions PSC-CMS-2W-LT



Connection analog with open collector alarm output

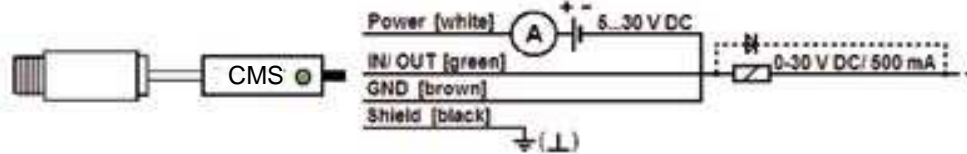


Combined Mode (analog and digital)

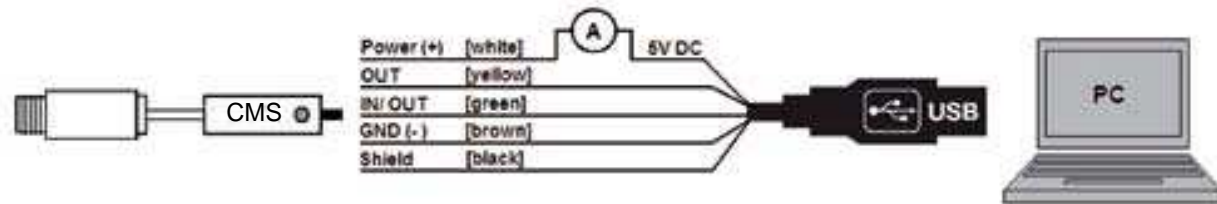


Accessories (examples)

CF-lens
(AC-SSS-PW)



Air purge collar (AC-SSS-AP)



Mounting bracket, fixed
(AC-SSS-FB2)

